

4 Britton Lane | P.O. Box 285 | Lyme, NH 03768 | 800.782.9927 | info@tarmbiomass.com | www.tarmbiomass.com

# HS TARM Bonus Plus


Wood-fired  
Gasification  
Add-on Boiler

- No compromise affordability
- Small footprint, high output
- Low maintenance design
- Induced Draft Gasification Technology
- Legendary HS Tarm build strength



The little sibling of the Solo Innova, the Bonus Plus is ideally sized for small to mid-sized homes with average to good insulation. When combined with thermal storage, the Bonus Plus allows for energy independence and is sure to provide the satisfaction that results from realizing a smart investment.

Visit [www.woodboilers.com](http://www.woodboilers.com) for more information about this boiler including installation and planning documents.

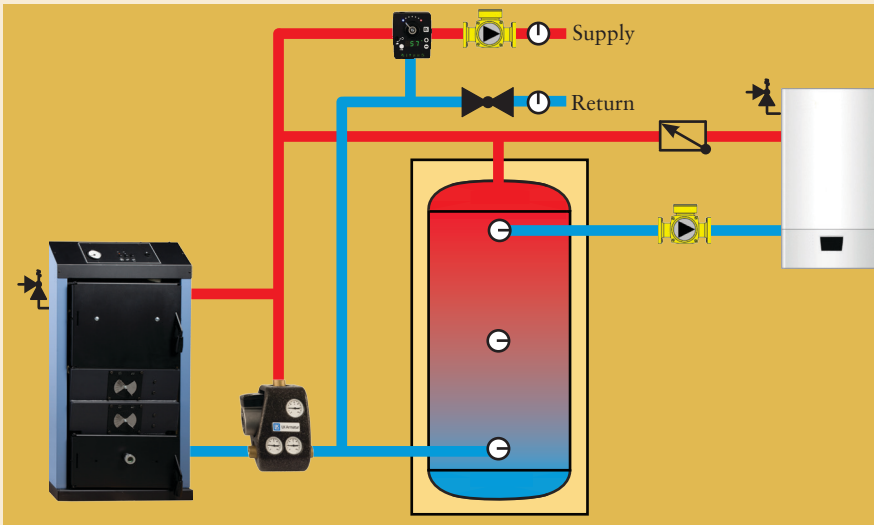

### Easy Integration

Tarm Biomass has unparalleled expertise integrating wood boilers with conventional heating systems. We offer our customers a variety of conceptual diagrams that may be used to connect new boilers to existing heating systems, whether forced air, in-floor radiant, baseboard, or any type of heating system in between.

### Big Heat Small Price

Your "Bonus" is affordability "Plus" no compromising with this efficient and clean burning boiler, which exceeds Europe's Class 5 rating<sup>1</sup>. At 825 pounds, the Bonus Plus is no lightweight with regard to quality or features.

- Round heat exchange tubes are vertically oriented and arrive standard with turbulators for increased ash separation and efficiency.
- 28" high flue collar and short over-all boiler height allows installation in basements with low ceilings and connection to almost any chimney thimble.
- Reversible, full firebox width doors.
- Firebox heat cladding for enhanced combustion.
- High quality EBM induction blower.
- Firebase primary air for consistent clean combustion.
- Arrives fully assembled.
- Exterior mounted doors to all air and exhaust passages for simple maintenance.
- Danish engineering derives high function from simple form.


<sup>1</sup> Minimum boiler efficiency of 88.47%, CO <700 mg/m<sup>3</sup>, OGC <30mg/m<sup>3</sup>, Dust <60 mg/m<sup>3</sup>

### Warranty

Each Bonus Plus boiler, when installed with an adequate heat storage system, is covered by a 20-year limited warranty. A copy is available for your inspection, and is provided with each boiler.

### Disclaimer

Tarm Biomass® is not responsible for factory alterations to measurements. For final specifications and operational requirements, please see the Bonus Plus Owner's Manual.

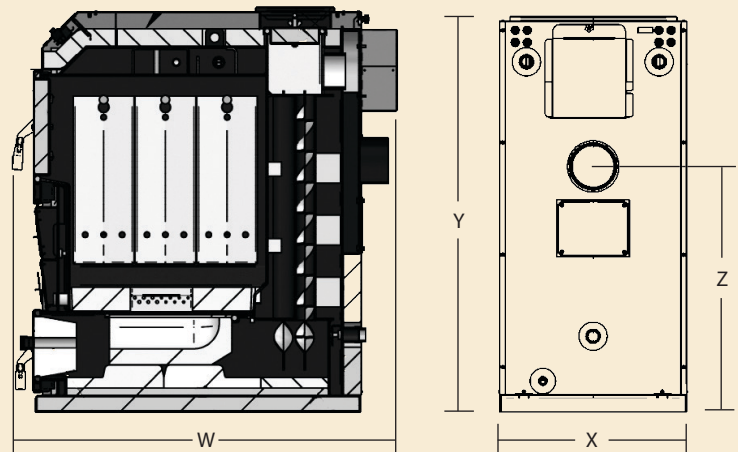

### Technical Data

Maximum heat output	BTU/hr	102,000
Firebox volume	cubic feet	3.2
Load door	in. X in.	13¾ X 12
Max. wood length	inches	20
Unit length W	inches	43
Unit width X	inches	23
Unit height Y	inches	45
Water Volume	gallons	31.7
Weight	pounds	825
Flue collar size	inches	5
Height of flue collar Z	inches	28

Dimensions are subject to technical alterations.

Pressure tested in accordance with EN 303-5, NON-ASME